


Micro

Precision Chucks

ALBRECHT
GERMANY

ALBRECHT


Precision Chucks

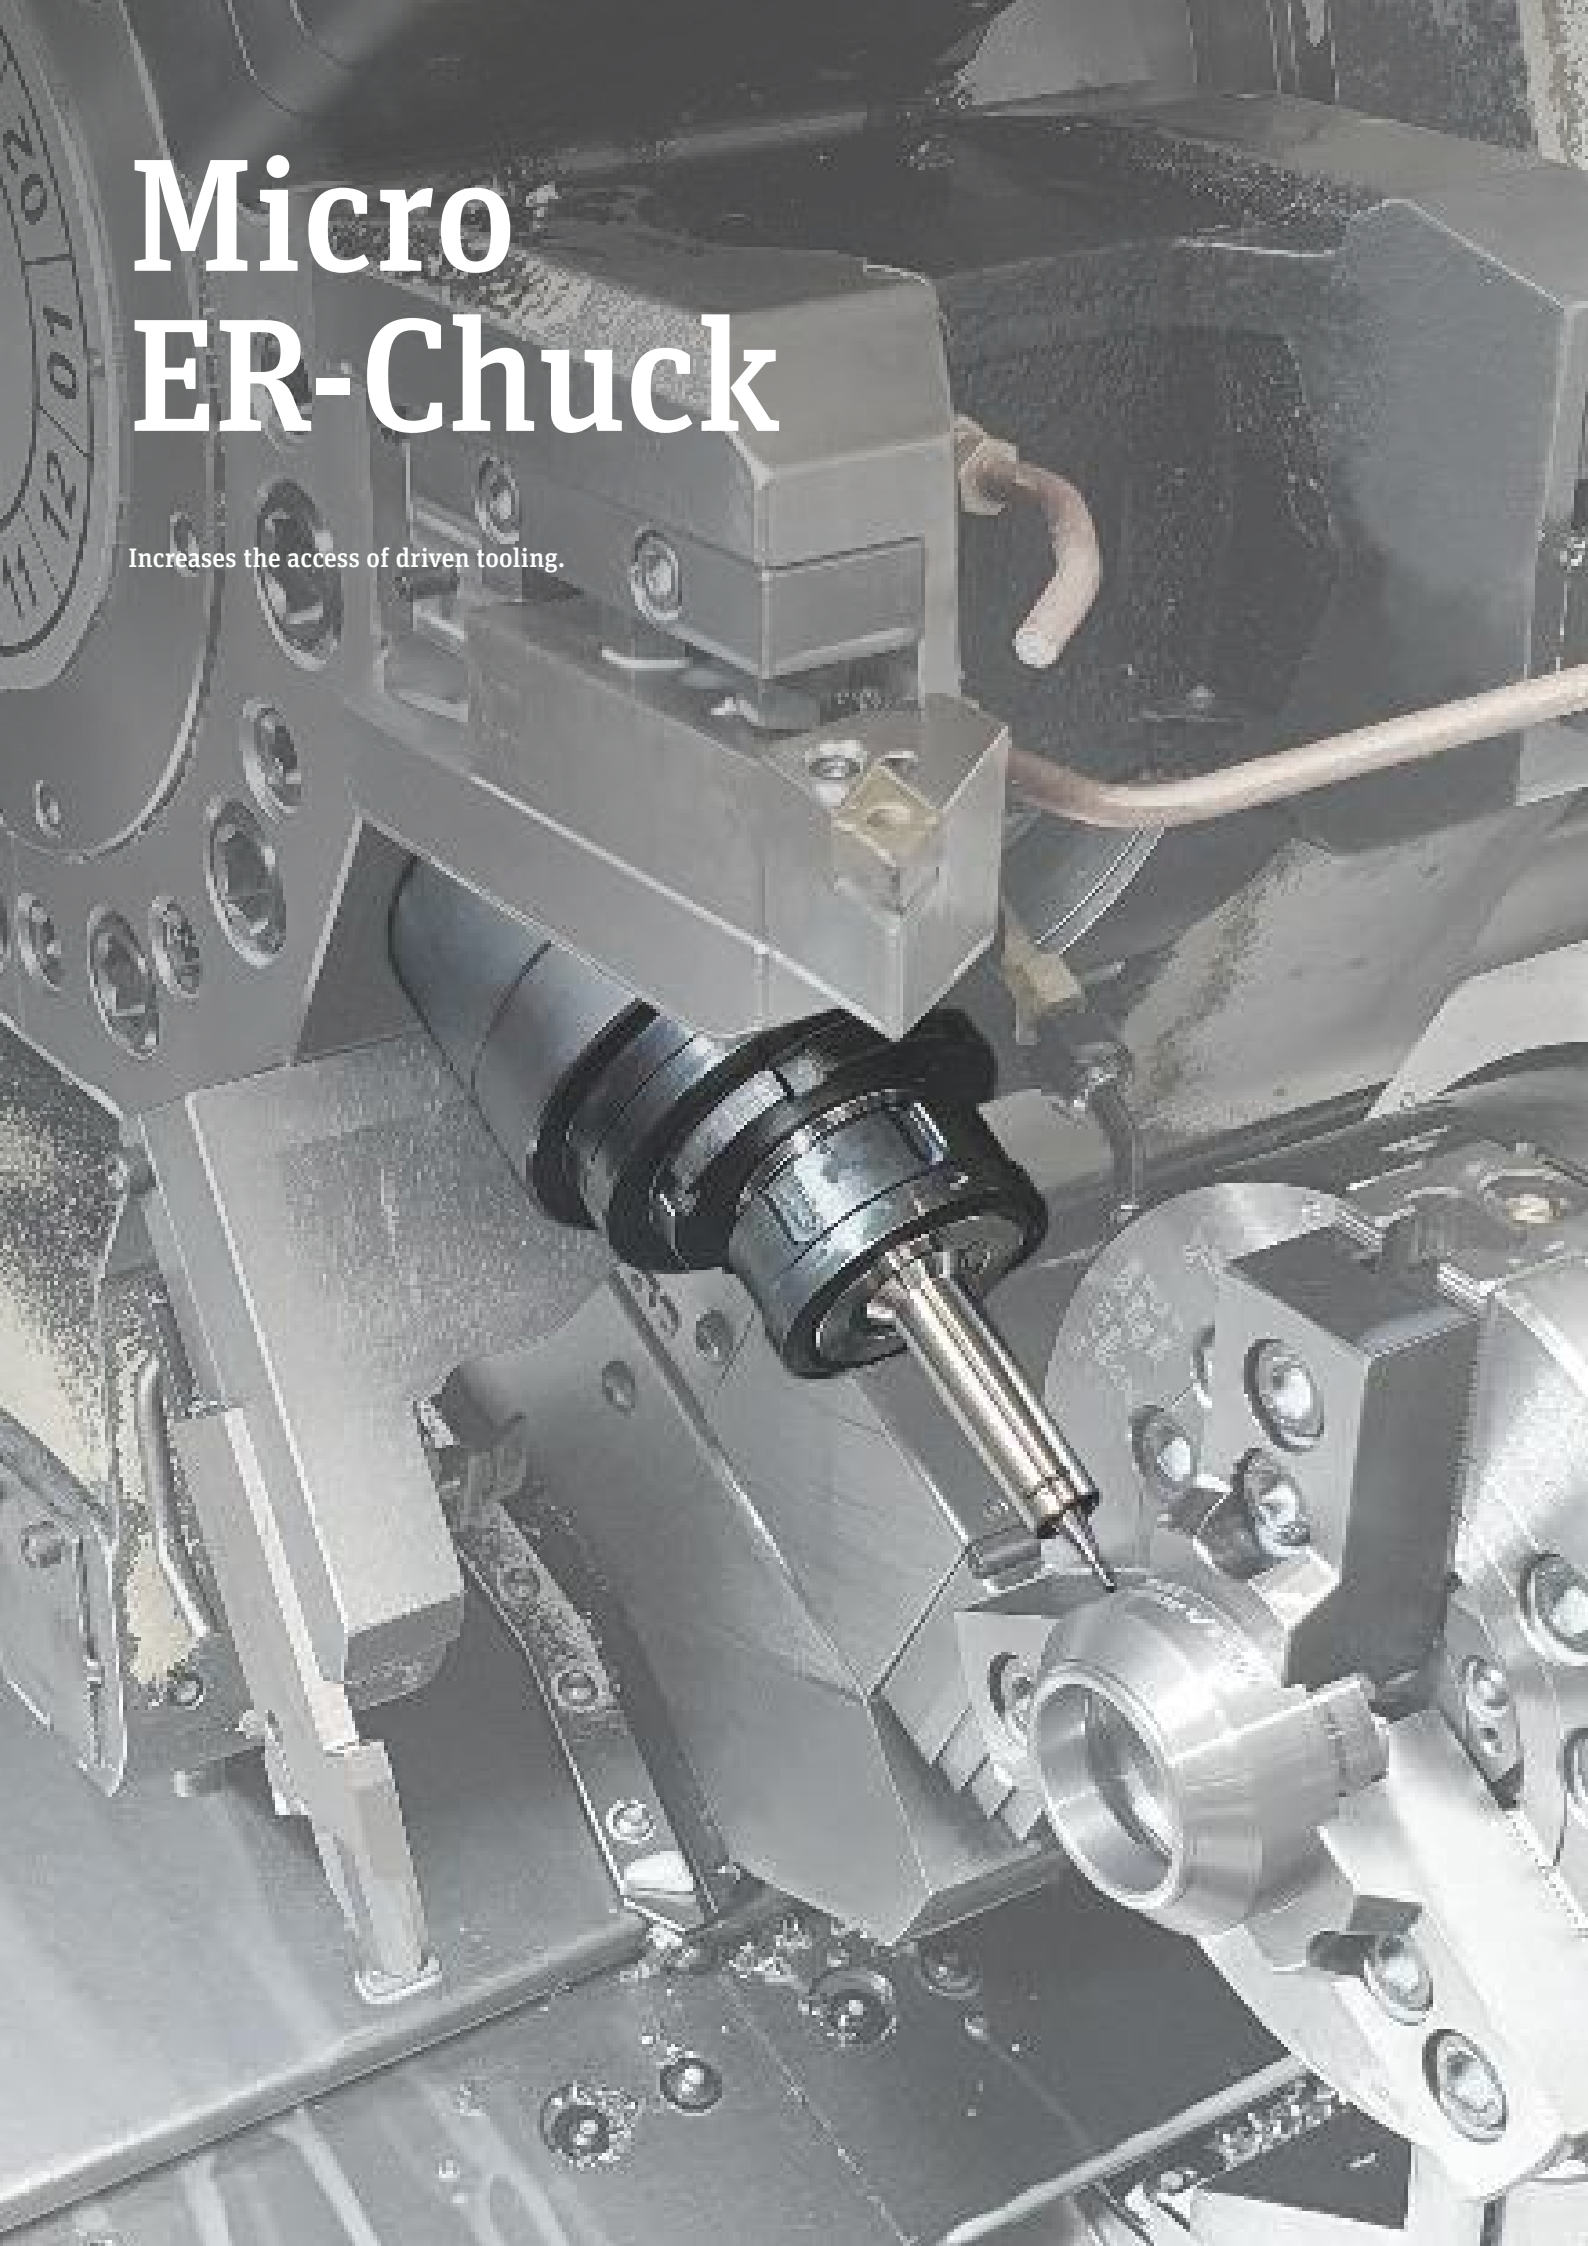

Micro ER-Chuck

Increases the access of driven tooling.


Micro ER-Precision-Chuck, for Collet-Chucks according to DIN ISO 15488
Easy exchange of tools by using a hex-key (included in delivery). Maintenance-free. Sealed against coolant and particles. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

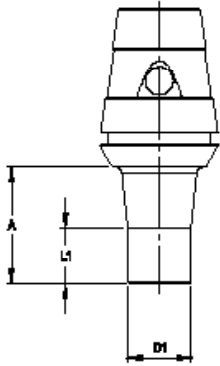

High chip removal and process-reliability with driven tooling

High-speed balanced

Coolant directed to cutting tool

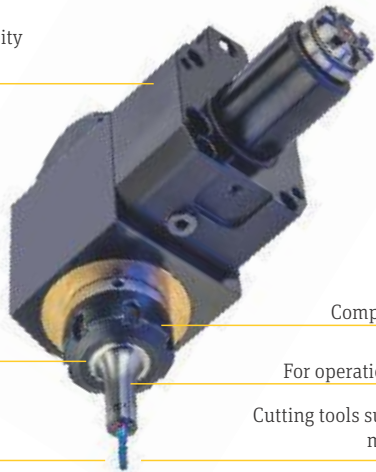

Compatible with common ER-nuts
For operation areas with difficult access.
Cutting tools supported over greater length, more rigidity and dampening.

ER 16 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
35	310 1006 316 1 *	35	13,5	by design	0,1

* Special ER-nut included in delivery



ER 20 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
28	310 1006 320 1	28	13,5	by design	0,1
35	310 2006 320 1	35	13,5	by design	0,1



ER 25 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
25	310 1006 325 1	12	13,5	by design	0,1
40	310 2006 325 1	15	13,5	by design	0,1
50	310 3006 325 1	20	13,5	by design	0,1



ER 32 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
25	310 1006 332 1	12	13,5	by design	0,2
40	310 2006 332 1	15	13,5	by design	0,2
50	310 3006 332 1	20	13,5	by design	0,2

